


耐低温复合软管 CH07

Low temperature resistant composite hose CH07

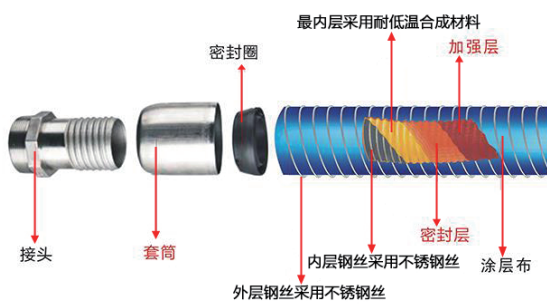

产品优势

Product advantages



材料结构：

内螺旋：不锈钢丝
外螺旋：不锈钢丝
内管：耐低温合成材料

Material structure:

Inner screw: stainless steel wire
Outer screw: stainless steel wire
Inner tube: low temperature resistant synthetic material

尺寸规格：

内径：Ø25mm---152mm（支持定制）
标准长度：40m（支持定制）
工作温度范围：-190°C / +60°C

Dimensions:

Internal diameter : Ø25mm---152mm
(Support customization)
Standard length : 40m(Support customization)
Length operating temperature range : -190°C / +60°C

适用流体类型

Applicable fluid type



产品应用：

电阻小于 10 欧姆，外管导电效果好，能及时消除管壁静电。主要用于低温环境下的抽吸和排放，常用来输送低温类的流体产品。软管结构轻便灵活，易于清洗处理。结实，耐磨。且成本低。

Product application:

The resistance is less than 10 ohms, and the outer tube has good conductive effect, which can eliminate the static electricity on the tube wall in time. It is mainly used for suction and discharge in low-temperature environment, and is often used to transport low-temperature fluid products. The hose structure is light and flexible, easy to clean. Strong and wear-resistant. And the cost is low.

品名 PART NAME	内径 INNER DIA		弯曲半径 BEND RADIUS	工作压力 WORK PRESSURE		爆破压力 BURST PRESSURE		标准长度 STANDARD LENGTH
	(mm)	(inch)		Bar	psi	Bar	psi	
CH07-025	25	1"	100	25	362.5	75.0	1087.5	40
CH07-038	38	1-1/2"	112	25	362.5	75.0	1087.5	40
CH07-051	51	2"	150	25	362.5	75.0	1087.5	40
CH07-065	65	2-1/2"	190	25	362.5	75.0	1087.5	40
CH07-076	76	3"	225	25	362.5	75.0	1087.5	40
CH07-102	102	4"	350	25	362.5	75.0	1087.5	40
CH07-152	152	6"	600	25	362.5	75.0	1087.5	40

Composite hose