

食品级聚酯纤维编织硅胶软管

Food grade polyester fiber woven silicone hose

BP20

材质结构:

内/外层: 食品级铂金硅胶
增强层: 聚酯纤维编织网

Material structure:

Inner / outer layer: Food grade platinum silica gel
Reinforcing layer: Polyester woven mesh

尺寸规格:

内径: Ø3mm---38mm (支持定制)
标准长度: 20M
工作温度范围: -60°C / +180°C

Dimensions:

Internal diameter: Ø3mm---38mm(Support customization)
Standard length: 20M
Length operating temperature range: -60°C / +180°C

产品应用:

广泛用于高低温食品, 乳制品, 食品用油类、化妆品、化工, 制药行业和生物工程用的液体或半液体流体的输送, 如牛奶, 果汁, 食品机械设备用连接管, 酒类用连接导管; 医药设备连接管路等。同时可配有3A, SMS DIN, CLAMP快速接头。


Product application:

It is widely used in the transportation of liquid or semi-liquid fluids for high and low temperature food, dairy products, food oils, cosmetics, chemical industry, pharmaceutical industry and Bioengineering, such as connecting pipes for milk, fruit juice, food machinery and equipment, and connecting pipes for alcohol; Medical equipment connecting pipeline, etc. At the same time, it can be equipped with 3A, SMS, DIN and clamp quick connectors.

Food Grade Silicone Hose



外观:
透明光滑
Transparent and smooth

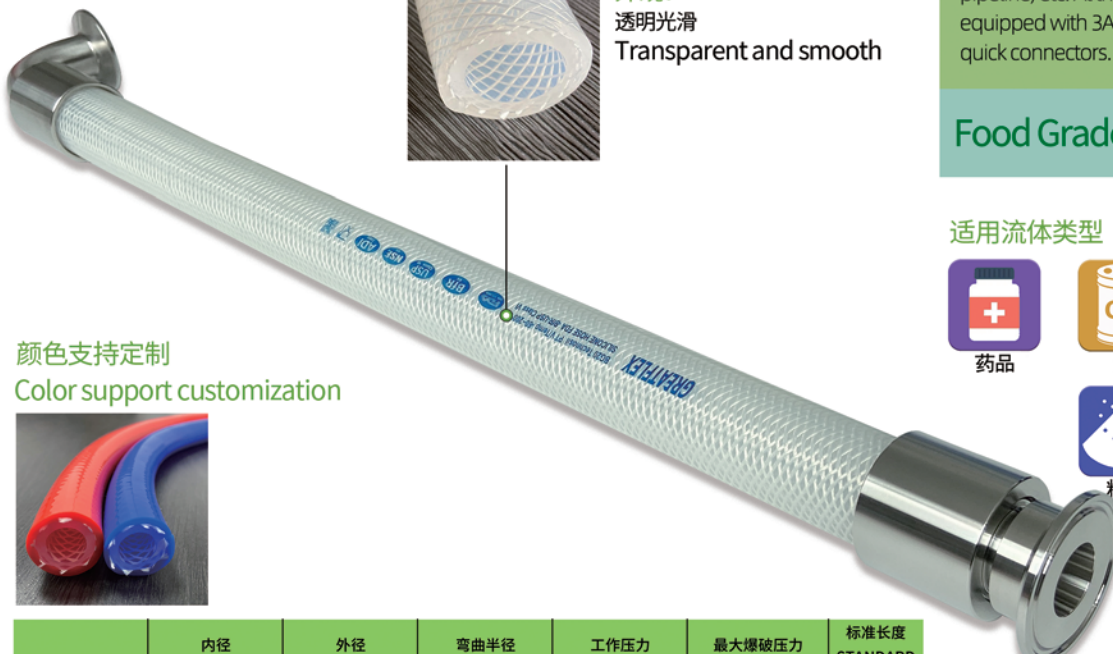

颜色支持定制

Color support customization



适用流体类型



品名 PART NAME	内径 INNER DIA		外径 OUTER DIA		弯曲半径 BEND RADIUS		工作压力 WORK PRESSURE		最大爆破压力 BURST PRESSURE		标准长度 STANDARD LENGTH 米/根 M/Pcs
	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	Bar	psi	Bar	psi	
BP20-003	3.18	1/8	9.30	0.354	35	1/2	15.0	217.5	45.0	652.5	20
BP20-004	4.00	1/6	10.00	0.394	40	3/4	12.0	174	36.0	522	20
BP20-005	5.00	3/16	11.00	0.433	50	1	10.0	145	30.0	435	20
BP20-006	6.35	1/4	13.20	0.519	55	1-1/2	9.3	134.85	27.9	404.55	20
BP20-008	7.93	5/16	15.00	0.591	58	1-3/4	7.7	111.65	23.1	334.95	20
BP20-010	9.52	3/8	16.60	0.654	60	2-1/4	7.0	101.5	21.0	304.5	20
BP20-012	12.70	1/2	20.30	0.799	70	2-3/4	6.0	87	18.0	261	20
BP20-016	15.87	5/8	24.50	0.965	85	3-1/4	5.0	72.5	15.0	217.5	20
BP20-019	19.05	3/4	27.90	1.099	95	3-3/4	4.0	58	12.0	174	20
BP20-022	22.20	3/4	31.30	1.233	145	5-3/4	3.6	52.2	10.8	156.6	20
BP20-025	25.40	1	34.50	1.358	157	6-1/4	3.0	43.5	9.0	130.5	20
BP20-032	31.75	1-1/4	40.80	1.606	204	8	2.3	33.35	6.9	100.05	20
BP20-038	38.00	1-1/2	50.50	2	250	9	1.8	26.1	5.4	78.3	20
BP20-051	50.00	2	63.00	2.5	330	12	1.1	15.95	3.3	47.85	10

产品特点优势

