




耐溶剂化工衬氟橡胶硅胶管 FV30

Solvent resistant chemical lined fluororubber silicone hose FV30

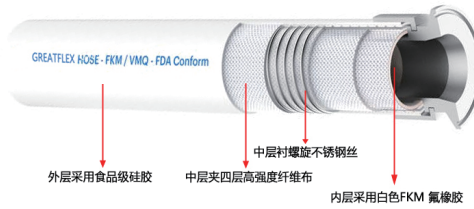

产品优势

Product advantages



材料结构:

内管: 白色 FKM 氟橡胶 (VITON 橡胶)
 增强层: 螺旋钢丝 + 四层聚酯纤维编织布
 外管: 食品级铂金硅胶, 颜色支持定制

Material structure:

Inner tube: white FKM fluororubber (Viton rubber)
 Reinforcing layer: spiral steel wire + four layers of polyester fiber woven cloth
 Outer tube: food grade platinum silica gel, color support customization

尺寸规格:

内径: Ø6mm---102mm (支持定制)
 标准长度: 6M/10M
 工作温度范围: -40°C / +200°C

Dimensions:

Internal diameter : Ø6mm---159mm(Support customization)
 Standard length : 6M/10M
 Length operating temperature range : -40°C / +200°C

适用流体类型

Applicable fluid type



产品应用:

由于内层为 VITON 橡胶, 因此特别推荐输送与硅胶不相容的腐蚀性液体, 例如酸或油。该管耐真空, 也可用于高温下抽吸液体或半液体食品。

Product application:

Since the inner layer is Viton rubber, it is especially recommended to transport corrosive liquids incompatible with silicic acid, such as acid or oil. The tube is vacuum resistant and can also be used to pump liquid or semi liquid food under high temperature.

Industrial silicone hose

品名 (Part No)	内径 INNER DIA		壁厚 WALL THICKNESS ^{+1.0} / _{-0.5} mm	外径 OUTER DIA		拆弯半径 BEND RADIUS (mm)	工作压力 WORK PRESSURE		爆破压力 BURST PRESSURE		长度 (STANDARD LEGNTH) m/roll	真空度 VACUUM
	(mm)	(inch)		(mm)	(inch)		Bar	psi	Bar	psi		
FV30-013	13	1/2	5.5	24	0.9449	45	17.2	249.4	51.6	748.2	6或10	0.91 Bar (13.23 psi)
FV30-016	16	5/8	5.5	27.0	1.06	52	15.7	227.65	47.1	682.95	6或10	0.91 Bar (13.23 psi)
FV30-019	19	3/4	5.5	30	1.1811	61	14.5	210.25	43.5	630.75	6或10	0.91 Bar (13.23 psi)
FV30-025	25	1	5.5	36.0	1.42	75	12.3	178.35	36.9	535.05	6或10	0.91 Bar (13.23 psi)
FV30-032	32	1-1/4	5.5	43	1.6929	108	11.0	159.5	33.0	478.5	6或10	0.91 Bar (13.23 psi)
FV30-038	38	1-1/2	5.5	49.0	1.93	120	10.0	145	30.0	435	6或10	0.91 Bar (13.23 psi)
FV30-051	51	2	5.5	62	2.4409	160	8.0	116	24.0	348	6或10	0.91 Bar (13.23 psi)
FV30-057	57	2-1/4	5.5	68.0	2.68	169	7.2	104.4	21.6	313.2	6或10	0.91 Bar (13.23 psi)
FV30-063	63	2-1/2	5.5	74	2.9134	195	6.7	97.15	20.1	291.45	6或10	0.91 Bar (13.23 psi)
FV30-076	76	3	6	88.0	3.46	242	6.0	87	18.0	261	6或10	0.91 Bar (13.23 psi)
FV30-090	90	3-1/2	6	102	4.0157	320	5.5	79.75	16.5	239.25	6	0.91 Bar (13.23 psi)
FV30-102	102	4"	6.5	115.0	4.53	410	5.0	72.5	15.0	217.5	6	0.91 Bar (13.23 psi)