




汽车硅胶夹布软管 SP40

Automotive silicone cloth clamping hose SP40

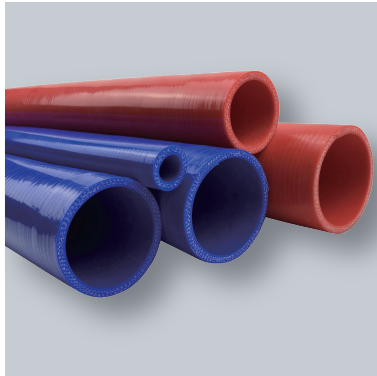

材料结构:

内外管: 蓝色工业级硅胶, 内外表面光滑, 颜色支持定制
 增强层: 四层聚酯纤维编织布

Material structure:

Inner and outer tubes: blue industrial silica gel, Smooth internal and external surfaces,color support customization
 Reinforcing layer: four layers of polyester fiber woven cloth

尺寸规格:

内径: Ø6mm---102mm (支持定制)
 标准长度: 6M
 工作温度范围: -60°C / +180°C

Dimensions:

Internal diameter : Ø6mm---159mm
 (Support customization)
 Standard length : 6M
 Length operating temperature range : -60°C / +180°C

适用流体类型

Applicable fluid type



产品优势

Product advantages



品名 Part No.	内径 INNER DIA		壁厚 THICKNESS +/-0.8mm	工作压力 WORKING PRESSURE		最大爆破压力 BURST PRESSURE		标准长度 STANDARD LENGTH
	(mm)	(inch)		Bar	psi	Bar	psi	
SP40-006	6	1/4"	5.2	11.7	169	35.0	508	6
SP40-008	8	5/16"	5.2	10.7	155	32.0	464	6
SP40-010	10	3/8	5.2	9.7	140	29.0	421	6
SP40-013	13	1/2	5.2	8.7	126	26.0	377	6
SP40-016	16	5/8	5.2	8.0	116	24.0	348	6
SP40-019	19	3/4	5.2	7.7	111	23.0	334	6
SP40-025	25	1	5.2	6.5	97	20.0	290	6
SP40-032	32	1-1/4	5.2	5.7	82	17.0	247	6
SP40-038	38	1-1/2	5.2	5.0	73	15.0	218	6
SP40-045	45	1-3/4	5.2	4.5	65	13.5	195	6
SP40-051	51	2	5.2	4.0	58	12.0	174	6
SP40-057	57	2-1/4	5.2	3.7	53	11.1	160	6
SP40-063	63	2-1/2	5.2	3.3	48	10.0	145	6
SP40-076	76	3	5.2	2.7	39	8.0	116	6
SP40-089	89	3-1/2	5.2	2.0	29	6.0	87	6
SP40-102	102	4	5.2	1.7	24	5.0	73	6

产品应用:

耐高低温, 抗老化, 耐撕裂, 常用于汽车工程机械中, 也可以作为电器、电线的硅橡胶护套管。在交通运输, 造船工业, 无线电, 电机, 电讯工业, 仪器, 仪表工业中被广泛应用。

Product application:

It is resistant to high and low temperature, aging and tearing. It is commonly used in automotive engineering machinery, and can also be used as silicone rubber sleeve for electrical appliances and wires. It is widely used in transportation, shipbuilding industry, radio, electric machinery, telecommunication industry, instrument and meter industry.

Industrial silicone hose