




# 工业机械硅胶管 SP70

## Industrial machinery silicone hose SP70

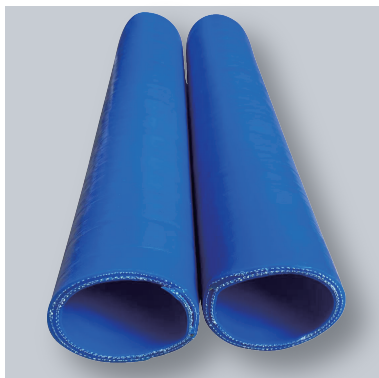

### 材料结构:

内外管: 蓝色工业级硅胶, 内外表面光滑, 颜色支持定制

增强层: 螺旋钢丝 + 四层聚酯纤维编织布

### Material structure:

Inner and outer tubes: blue industrial silica gel, Smooth internal and external surfaces,color support customization

Reinforcing layer: spiral steel wire + four layers of polyester

### 尺寸规格:

内径: Ø6mm---102mm (支持定制)

标准长度: 6M

工作温度范围: -60°C / +180°C

### Dimensions:

Internal diameter : Ø6mm---159mm

(Support customization)

Standard length : 6M

Length operating temperature range : -60°C / +180°C

### 适用流体类型

### Applicable fluid type



### 产品优势

### Product advantages



### 产品应用:

该管耐高低温, 抗老化, 耐撕裂, 抗正负压。在机械制造, 工业, 工厂, 交通运输, 造船工业, 无线电, 电机, 电讯工业, 仪器, 仪表工业中被广泛应用。

### Product application:

The pipe is resistant to high and low temperature, aging, tearing and positive and negative pressure. It is widely used in machinery manufacturing, industry, factory, transportation, shipbuilding industry, radio, motor, telecommunication industry, instrument and meter industry.

品名	内径		壁厚 +/-0.8mm	工作压力		爆破压力		标准长度 米/根
	(mm)	(inch)		Bar	psi	Bar	psi	
SP70-006	6	1/4	4.5	26.0	377	78.0	1131	6
SP70-008	8	5/16	4.5	21.5	311.75	64.5	935.25	6
SP70-010	10	3/8	4.5	19.3	279.85	57.9	839.55	6
SP70-013	13	1/2	4.5	17.2	249.4	51.6	748.2	6
SP70-016	16	5/8	4.5	15.7	227.65	47.1	682.95	6
SP70-019	19	3/4	4.5	14.5	210.25	43.5	630.75	6
SP70-025	25	1	4.5	12.3	178.35	36.9	535.05	6
SP70-032	32	1-1/4	4.5	11.0	159.5	33.0	478.5	6
SP70-038	38	1-1/2	4.5	10.0	145	30.0	435	6
SP70-045	45	1-3/4	4.5	9.0	130.5	27.0	391.5	6
SP70-051	51	2	4.5	8.0	116	24.0	348	6
SP70-057	57	2-1/4	4.5	7.2	104.4	21.6	313.2	6
SP70-063	63	2-1/2	4.5	6.7	97.15	20.1	291.45	6
SP70-076	76	3	4.5	6.0	87	18.0	261	6
SP70-090	89	3-1/2	4.5	5.5	79.75	16.5	239.25	6
SP70-102	102	4	4.5	5.0	72.5	15.0	217.5	6

Industrial silicone hose