

# 食品级透明钢丝PVC软管

Food grade transparent steel wire PVC hose

# PC10

**材质结构:**

内/外管: 食品级透明PVC  
 增强层: 单层SS304不锈钢丝, 间距为5MM

**Material structure:**

Inner / outer tube: food grade transparent PVC  
 Reinforcing layer: single layer SS304 stainless steel wire with a spacing of 5mm

**尺寸规格:**

内径: Ø13mm--102mm (支持定制)  
 标准长度: 50M  
 工作温度范围: -40°C / +80°C

**Dimensions:**

Internal diameter: Ø13mm---102mm(Support customization)  
 Standard length: 50M  
 Length operating temperature range: -40°C / +80°C


**产品应用:**

价格实惠, 适用于输送低温食品物质, 有良好的抗负压能力, 有一定的耐高压性, 也常被用于各种酒类, 饮料抽吸用连接导管。

**Product application:**

Affordable, suitable for conveying low-temperature food substances, with good anti negative pressure ability and certain high pressure resistance. It is also often used for connecting pipes for suction of various wines and beverages.

Food grade plastic hose

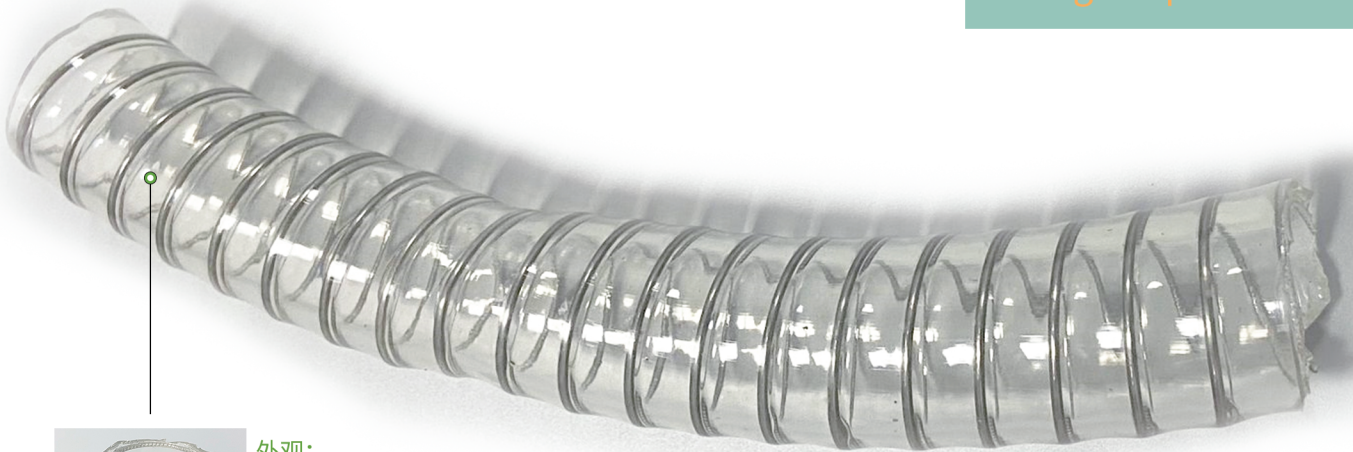

**外观:**  
 内外壁光滑  
 smooth inner and outer walls

**产品特点优势**

-   
食品级
-   
耐负压
-   
抗高压
-   
耐低温
-   
透明性好
-   
支持定制
-   
弯曲性好

**适用流体类型**

-   
粉料
-   
油
-   
水
-   
气体

品名 PART NAME	内径 INNER DIA		壁厚 WALL THICKNESS		外径 OUTER DIA		拆弯半径 BEND RADIUS	工作压力 WORK PRESSURE		标准长度 STANDARD LENGTH 米/根 METERS PER PC
	(mm)	(inch)	+1.0/ -0.5mm	+0.04/0.02"	(mm)	(inch)		Bar (20°C)	psi (68°F)	
PC10-013	13	1/2	3.5	0.13"	20.0	0.80	100	5.50	79.75	50
PC10-019	19	3/4	3.5	0.13"	26.0	1.69	115	5.00	72.5	50
PC10-025	25	1	3.5	0.13"	32.0	1.42	125	4.90	71.05	50
PC10-032	32	1-1/4	3.5	0.13"	39.0	1.69	135	4.30	62.35	50
PC10-038	38	1-1/2	3.5	0.13"	45.0	1.89	155	4.12	59.74	50
PC10-045	45	1-3/4	4	0.16"	53.0	2.16	160	3.65	52.925	50
PC10-051	51	2	4	0.17"	59.0	2.44	165	3.45	50.025	50
PC10-057	57	2-1/4	4	0.18"	65.0	2.64	173	3.00	43.5	50
PC10-063	63	2-1/2	4	0.19"	71.0	2.88	181	2.60	37.7	50
PC10-076	76	3	5	0.20"	86.0	3.39	232	2.50	36.25	50
PC10-090	90	3-1/2	5	0.20"	100.0	3.94	285	2.30	33.35	50
PC10-102	102	4	5	0.20"	112.0	4.49	367	2.00	29	50