




硅胶暖风管 AH20

Silicone heating pipe AH20

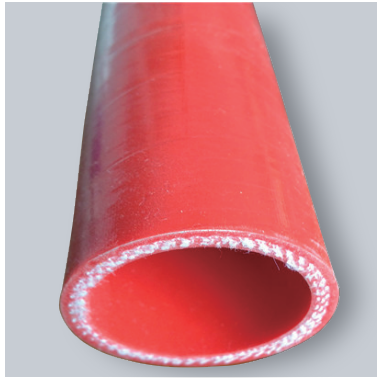

材料结构:

内外管: 红色工业级硅胶, 内外表面光滑, 颜色支持定制
 增强层: 多层聚酯纤维编织布

Material structure:

Inner and outer tubes: red industrial grade silicone, with smooth inner and outer surfaces, and customized colors
 Reinforcing layer: multilayer polyester fiber woven cloth

尺寸规格:

内径: Ø6mm---102mm (支持定制)
 标准长度: 6M
 工作温度范围: -60°C / +180°C

Dimensions:

Internal diameter : Ø6mm---159mm
 (Support customization)
 Standard length : 6M
 Length operating temperature range : -60°C / +180°C


适用流体类型

Applicable fluid type



产品优势

Product advantages

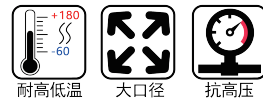

产品应用:

主要用于汽车改装, 造船工业, 电讯工业, 航空工业等。在各类汽车的进出气系统以及冷却系统中被广泛使用。也适用于水管、暖风管真空管。

Product application:

It is mainly used in automobile refitting, shipbuilding industry, telecommunications industry, aviation industry, etc. It is widely used in the inlet and outlet systems and cooling systems of various vehicles. It is also applicable to water pipes, heating pipes and vacuum pipes.

品名 Part No.	内径 INNER DIA		壁厚 THICKNESS +/-0.8mm	工作压力 WORKING PRESSURE		最大爆破压力 BURST PRESSURE		标准长度 STANDARD LENGTH
	(mm)	(inch)		Bar	psi	Bar	psi	
AH20-006	6	1/4"	5.2	11.7	169	35.0	508	6
AH20-008	8	5/16"	5.2	10.7	155	32.0	464	6
AH20-010	10	3/8	5.2	9.7	140	29.0	421	6
AH20-013	13	1/2	5.2	8.7	126	26.0	377	6
AH20-016	16	5/8	5.2	8.0	116	24.0	348	6
AH20-019	19	3/4	5.2	7.7	111	23.0	334	6
AH20-025	25	1	5.2	6.5	97	20.0	290	6
AH20-032	32	1-1/4	5.2	5.7	82	17.0	247	6
AH20-038	38	1-1/2	5.2	5.0	73	15.0	218	6
AH20-045	45	1-3/4	5.2	4.5	65	13.5	195	6
AH20-051	51	2	5.2	4.0	58	12.0	174	6
AH20-057	57	2-1/4	5.2	3.7	53	11.1	160	6
AH20-063	63	2-1/2	5.2	3.3	48	10.0	145	6
AH20-076	76	3	5.2	2.7	39	8.0	116	6
AH20-089	89	3-1/2	5.2	2.0	29	6.0	87	6
AH20-102	102	4	5.2	1.7	24	5.0	73	6

Industrial silicone hose